

DUMA




浙江杜马缝纫机股份有限公司
ZHEJIANG DUMA SEWING MACHINE CO., LTD.
地址：浙江省台州市椒江区机场南路58号
电话：0576-89086969 传真：0576-89086999
网址：www.cnduma.com



DM-1949A

上下同步送料平缝机

Top and bottom synchronous feed lockstitch sewing machine

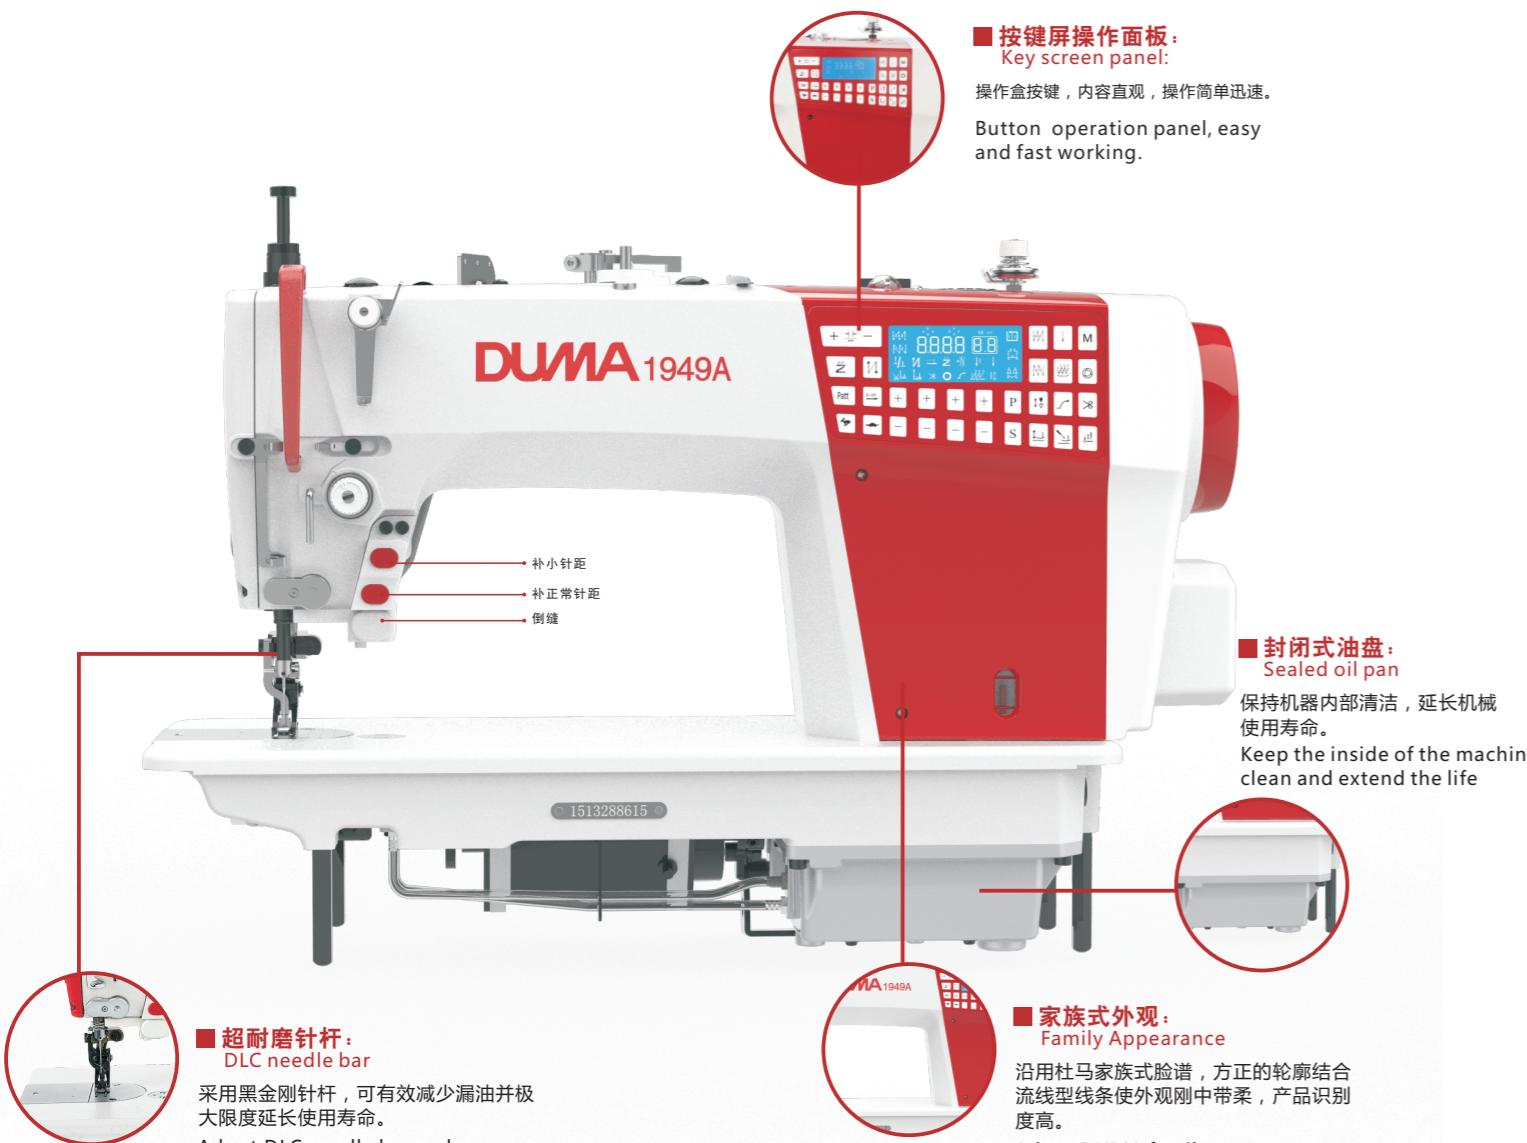

上下同步送料平缝机

- 家族式外观：沿用杜马家族式脸谱，方正的轮廓结合流线型线条使外观刚中带柔，产品识别度高。
- 按键屏操作面板：操作盒按键，内容直观，操作简便迅速。
- 超耐磨针杆：采用黑金刚针杆，可有效减少漏油并极大限度延长使用寿命。
- 封闭式供油循环：保持机器内部清洁，延长机械使用寿命。

Top and bottom synchronous feed lockstitch sewing machine

- Adopt DUMA family appearance, new style fashion, with high recognition With
- Button operation panel, easy and fast working.
- Use DLC needle bar reduces oil leakage and greatly extends using life,
- Sealed oil pan it Keep the inside of the machine clean and extend the life .



上送布轨迹微调

可通过外置机构调节上送布压脚运动轨迹，适应不同布料的吃省缝制。

Fine adjustment of the upper feed trajectory

The movement trajectory of the upper feeding presser foot can be adjusted through an external mechanism to adapt to the sewing of different fabrics.




摆油轴(防止错层功能)

压脚与送布牙同步运动，送布更顺畅，缝制不起皱。

Multi-axes moving Bottom and Top-feeding

Press foot and teeth moving together that make feeding more smoothly and Prevention crinkle

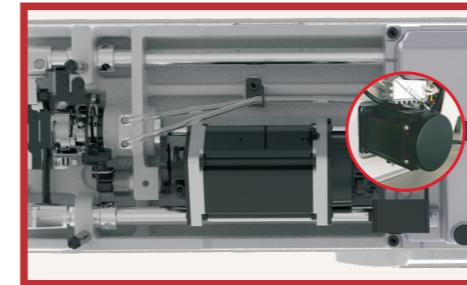


步进马达双向驱动技术（专利技术）：

Step Motor bidirectional driven technology (Patent) :

一个马达完成切线和抬压脚动作,实现静音操作。

步进马达控制针距与倒缝：

Step motor control stitch and Reserve sewing: one step motor control trimming and Pressing foot lifter work, and make the mute operation come true.

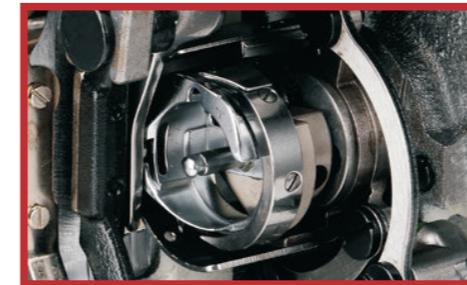


双动刀剪线：

pouble roune movable blufe thread trimmer:

可在机针正下方完成剪线，缝纫后线头最短3mm, 可有效减少人工剪线的工作量。

Achieve trimmer thread can below needle, then remaining thread can be as short as 3MM, effectively reduce man manual trimming workload.

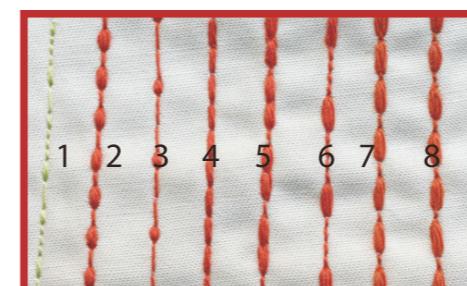

花样缝：

Pattern stitch:

由于步进马达控制,1949A可以自己设定产生D1-D8,8种不同线迹。

Due to the stepping motor control, 1949A can be set to generate D1-D8, 8 different stitches.

型号 Model: DM 1949A			
用途 Application :	薄料 - thin material	自动抬压脚高度 : Auto foot lifter height :	10mm
最高转速 : Max.Sewing speed :	4500RPM	主轴马达 : Main shaft :	AC伺服马达 AC servo motor 220V 550W
使用机针 : Needle :	Dbx1 11#-18#	针距控制 : Stitch length control :	步进马达 Step-motor
针杆行程 : Needle bar stroke :	31mm	抬压脚 : Foot lifter :	步进马达 Step-motor
送布牙高度 : Height of feed dog	1mm	切线 : Trimming :	步进马达 Step-motor
最大针距 : Max.stitch length :	5mm	润滑方式 : Lubricating system :	微油润滑 Mini-oil
手动抬压脚高度 : Handle foot lifter height :	6mm	净重/毛重 : N.W./G.W. :	39.7/42.5kg