

DUMA



浙江杜马缝纫机股份有限公司

ZHEJIANG DUMASEWINGMACHINE CO.,LTD.

地址：浙江省台州市椒江区机场南路58号

电话：0576-89086969 传真：0576-89086999

网址：www.cnduma.com



1949A

双步进智能上差动送料平缝机

Double-step intelligent upper differential feed lockstitch sewing machine

DUMA 杜马

1949A

双步进智能上差动送料平缝机

Double-step intelligent upper differential feed lockstitch sewing machine

型号Model: 1949A			
用途Application :	薄料至中厚料 - Thin to medium thick	自动抬压脚高度 : Auto foot lifter height :	10mm
最高转速 : Max.Sewing speed :	4500RPM	主轴马达 : Main shaft :	Ac伺服马达 AC servo motor 220V 550W
使用机针 : Needle :	Dbx1 11#—18#	针距控制 : Stitch length control :	步进马达 Step-motor
针杆行程 : Needle bar stroke :	31mm	抬压脚 : Foot lifter :	步进马达 Step-motor
送布牙高度 : Height of feed dog	1mm	切线 : Trimming :	步进马达 Step-motor
最大针距 : Max.stitch length :	5mm	润滑方式 : Lubricating system :	微油润滑Mini-oil
手动抬压脚高度 : Handle foot lifter height :	6mm	净重/毛重 : N.W/G.W :	39.7/45.8kg

超耐磨针杆:

DLC needle bar

采用黑金刚针杆，可有效减少漏油并极大限度延长使用寿命。

Adopt DLC needle bar, reduces oil leakage and greatly extends using life.



- 补小针距
- 补正常针距
- 倒缝

按键屏操作面板:

Key screen panel:

操作盒按键，内容直观，操作简单迅速。

Button operation panel, easy and fast working.



封闭式油盘:

Sealed oil pan

保持机器内部清洁，延长机械使用寿命。

Keep the inside of the machine clean and extend the life.





上送布轨迹微调

可通过外置机构调节上送布压脚运动轨迹，
适应不同布料的吃省缝制。

Fine adjustment of the upper feed trajectory

The movement trajectory of the upper feeding presser foot can be adjusted through an external mechanism to adapt to the sewing of different fabrics.




上送布压脚(防止错层功能)

压脚与送布牙同步运动，送布更顺畅，
缝制不起皱。

Top feed cloth presser foot (preventing layer stagger function)

Press foot and teeth moving together that make feeding more smoothly and Prevention crinkle.

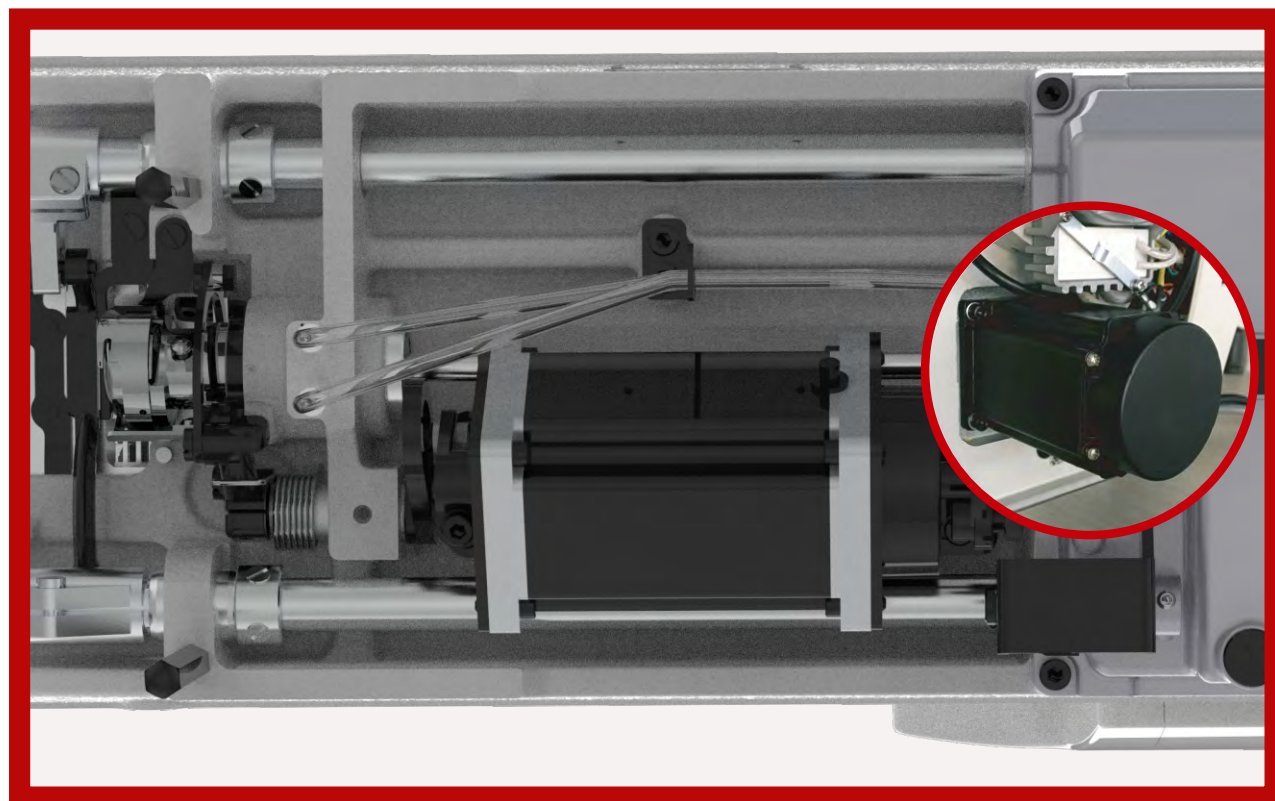

双步进马达驱动技术(专利技术) : (Patent) :

一个马达完成切线和抬压脚动作,实现静音操作。
一个马达控制针距和倒缝。


Step motor control stitch and Reserve sewing:
one step motor control trimming and Pressing
foot lifter work, and make the mute
operation come true.



双动刀剪线 : Double round movable blade thread trimmer:

可在机针正下方完成剪线, 缝纫后线头最短3mm,
可有效减少人工剪线的工作量。

Achieve trimmer thread can below needle,
then remaining thread can be as short as
3MM, effectively reduce man manual
trimming workload.

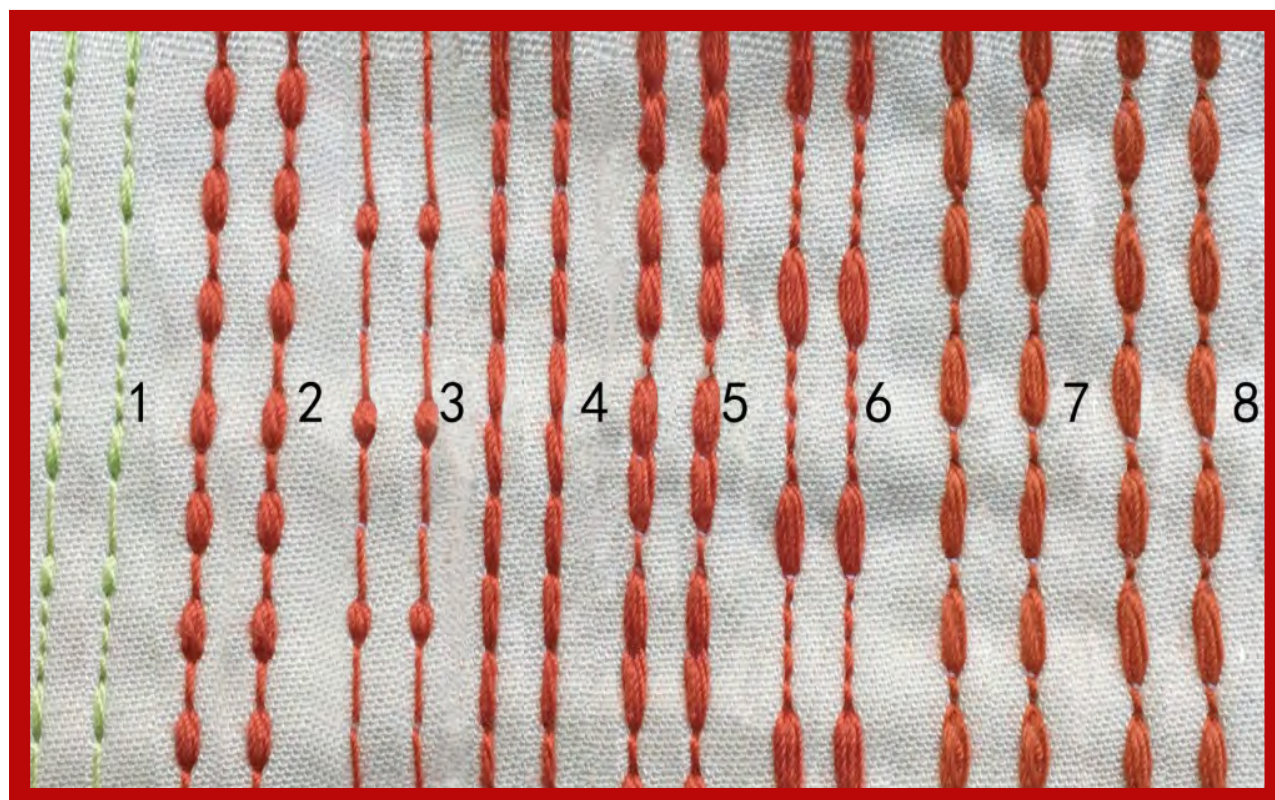

花样缝 : Pattern stitch:

由于步进马达控制,1949A可以自己设定产生D1-D8,8种不同线迹。

Due to the stepping motor control, 1949A
can be set to generate D1-D8, 8 different stitches.