



轻松驾驭各种面料！


It can be used in different kinds of material.

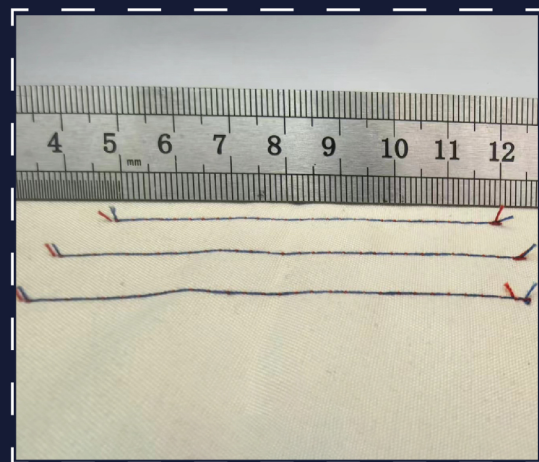


1.梭织 Tatting

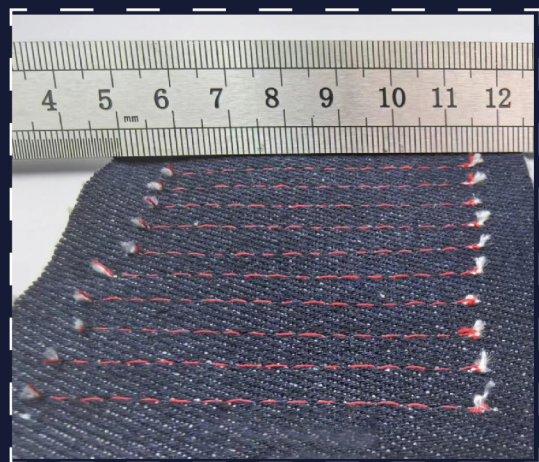

2.牛仔 Jeans

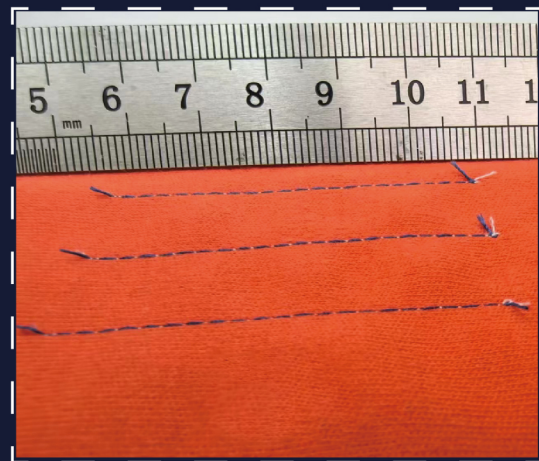

3.针织 Knitting

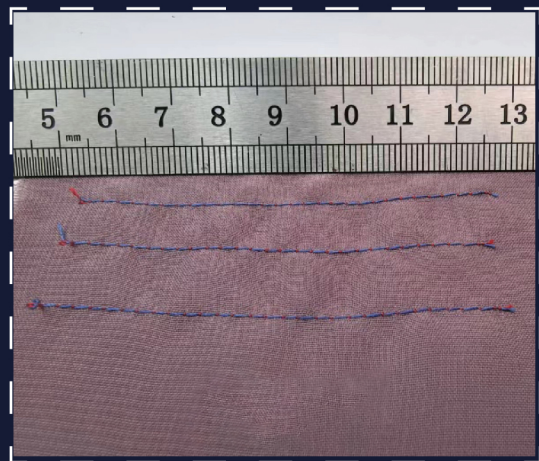

4.雪纺 Chiffon

产品参数 Product Parameter

 机器型号 Model name	 机针型号 Needle size	 针距(mm) Length stitch	 电子抬压脚 Auto-presser foot lifter	 自动剪线 Auto trimming	 下送料 Bottom feed
1969Max	(DB×1) #7~#16	0-5	有	有	有
 倒缝 Reverse sewing	 适用布料 Suitable fabric	 旋梭 Hook	 转速(rpm) Speed	 体积(cm) CBM	 毛净重(kg) G.W/N.W
有	薄料 中厚料 Medium & Light	标准旋梭 Standard	5000	715x305 x630	54.5/45.7

DUMA POWER

做全球最好的缝纫机

Produce the best sewing machine in the world

我们不断挑战现状

用创新塑造未来

We constantly challenge the current situation
and shape the future with innovation.

浙江杜马缝纫机股份有限公司

地址：浙江省台州市椒江区下陈街道机场南路58号
电话：0576-89086969 邮箱：DUMA3@CNDUMA.COM
网址：WWW.CNDUMA.COM



1969Max详情



官方公众号



官方抖音号



官方视频号

DUMA 杜马

线头烦恼一剪没


CUT OFF THE START BACK-TACKING LOOSE ENDS, AND YOUR TROUBLES ARE GONE

POWER


1969MAX 线头终结者



头部无油
HEAD OIL FREE

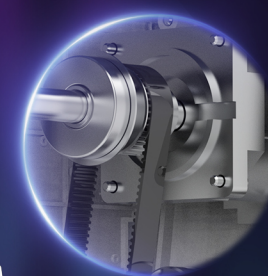

静净传动
QUIET CLEAN
DRIVE



超短线头
SUPER SHORT THREAD



AI智缝
AI SEWING

全球首创 不用剪线头的平缝机

THE WORLD'S FIRST-THE LOCKSTITCH WITHOUT THE NEED TO TRIM THREADS MANUALLY

1969Max

线头终结者

The Thread Terminator


☆ 防止自动切线平缝机“起缝时出现的鸟巢现象”。
Prevent thread Bird's nest at sewing beginning.

☆ 缩短缝制结束时线的残余量，节省手工摘线头的工作。
Shorten the residual amount of thread, save the work of manual trimming.

可以适应任何面料缝制工艺要求。
Can be adapted to any fabric sewing.

与众不同！

1. 无压脚限制，匹配市场任意压脚，省心省力。
Matching the market Various pressure feet; free from worry and save effort.

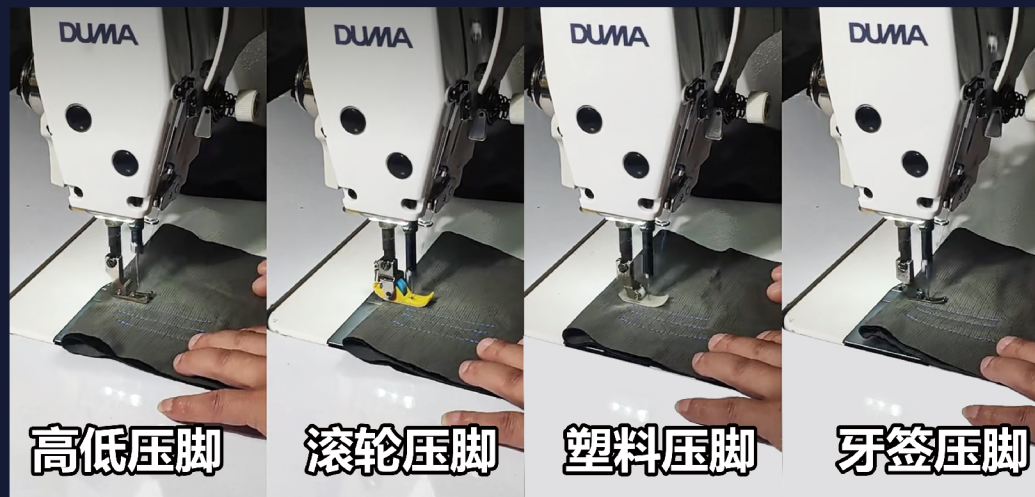

2. 操作台面无任何再增加外载装置，丝毫不影响操作空间。
Without any additional device, does not affect the operating space.

3. 线迹无鸟巢，前后剪线干净整洁。
No bird's nest in the stitch, Start/End back-tacking with clean and tidy.


大气外观

5寸液晶联网屏
IOT 5-inch LCD screen

305mm大空间台面
305mm large space

电子倒缝扳手
Reverse lever

进一步提升缝制品质。
Further improves the sewing quality.

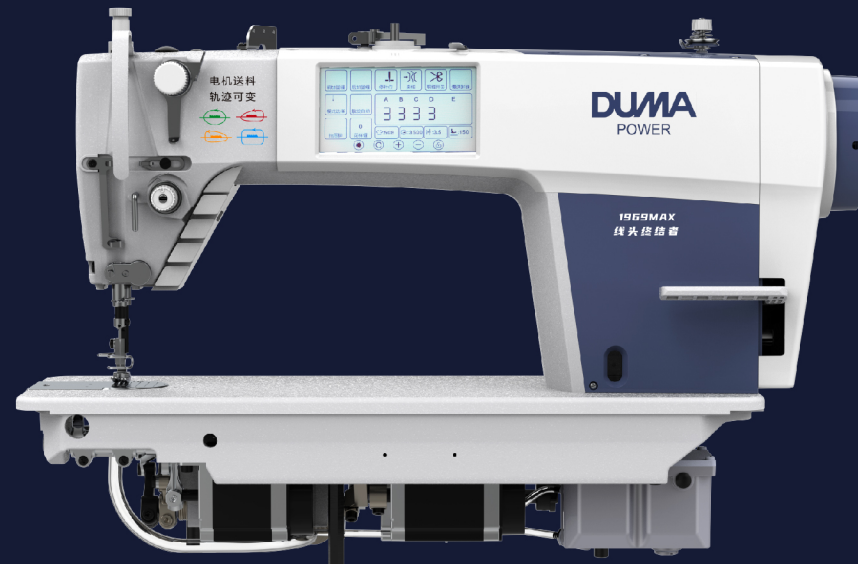


AI智缝

电子线张力夹线器
Electronic wire clamp

布厚实时检测
Cloth thickness sensor

系统根据布料薄厚变化智能调整到最佳缝制状态，输出最完美线迹。
Sensing fabric thickness to achieve perfect stitch.

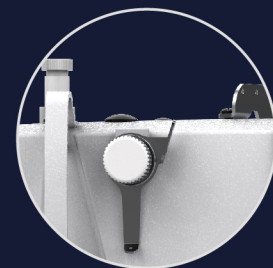

清洁缝纫

无油头部
Oil free take up lever

黑金刚(镀DLC)针杆的细节把控，
不再担心漏油问题。
DLC needle bar can avoid oil leakage

无油同步带传动
Oil free synchronous belt transmission

车速可达5000转/分，静音缝纫。
Speed up to 5000 RPM, vibration is small.



超短线头

起缝线头长3mm左右,后剪线头长2mm左右(标准配置)
The length of the starting thread is about 3mm, and the ends is about 2mm.(Standard configuration)



省成本

无需人工剪线头

Save cost
no need to trim thread manually



剪线稳

线头长度稳定一致

Stable trimming
The length of trimming thread
keeps stable





无空针

起缝首针带底线

Every needle with thread
The start back-tacking without the
thread coming loose

电子送料

送料轨迹电机调节，任何面料都能缝出精美线迹！
DigiFlex feed can suit for all fabrics.

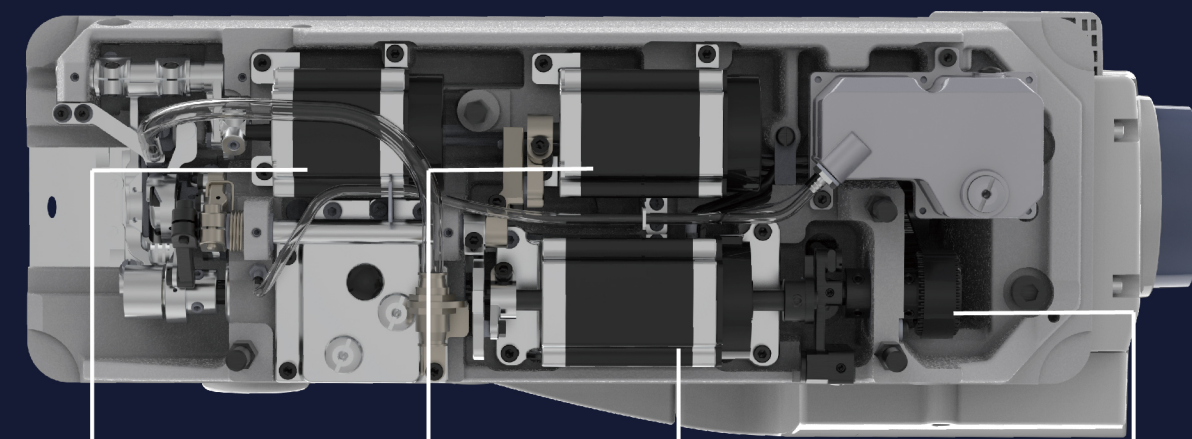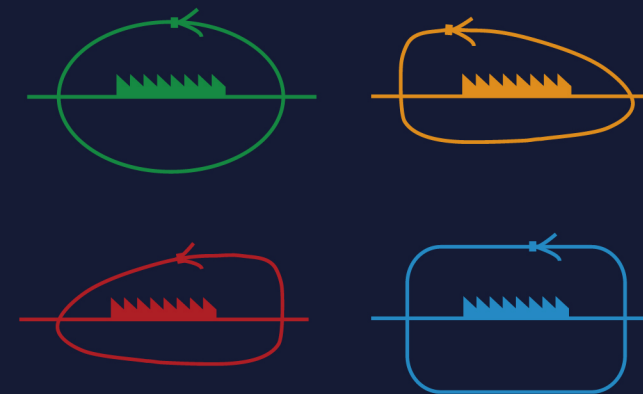

送料马达
DigiFlex feed

剪线马达
Auto-trimming
motor

剪线&抬压脚马达
Auto-trimming
Auto-presser foot liftermotor

同步带传动
Synchronous
belt transmission