

DUMA POWER

🌐 做全球最好的缝纫机

Produce the best sewing machine in the world

我们不断挑战现状

用创新塑造未来

We constantly challenge the current situation
and shape the future with innovation.



浙江杜马缝纫机股份有限公司

地址：浙江省台州市椒江区下陈街道机场南路58号

电话：0576-89086969 邮箱：DUMA3@CNDUMA.COM

网址：WWW.CNDUMA.COM



官方公众号



官方抖音号



官方视频号


DUMA 杜马

线头烦恼一剪没

CUT OFF THE START BACK-TACKING LOOSE ENDS, AND YOUR TROUBLES ARE GONE

POWER

1968NFM Max 线头终结者



针送料

NEEDLE FEEDING



超短线头

SUPER SHORT
THREAD



全球首创 不用剪线头的针送料平缝机

THE WORLD'S FIRST—THE NEEDLE FEEDING LOCKSTITCH WITHOUT THE NEED TO TRIM THREADS MANUALLY

1968NFM_{Max}

针送料无鸟巢平缝机

Needle feeding Anti Birdnest Lockstitch

★ 防“鸟巢”


Prevent the thread tangling.

★ 省去手工摘线头

Save the work of manual trimming.

★ 适应任何面料缝制工艺要求

Can be adapted to any fabric sewing.

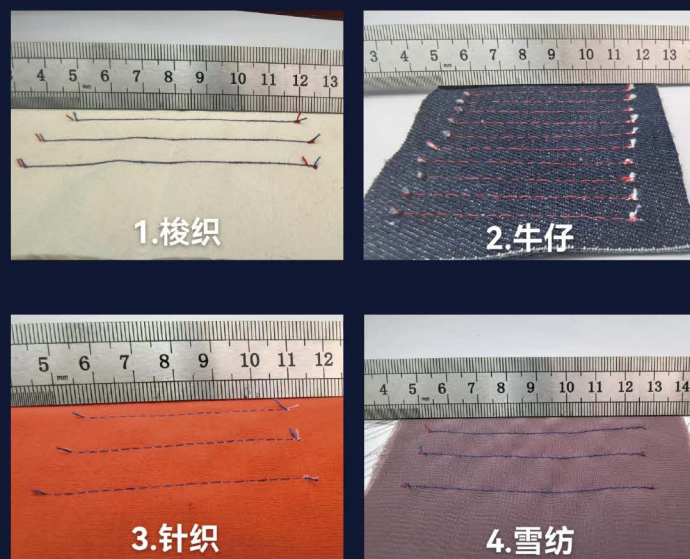

与众不同!

1. 无压脚限制，匹配市场任意压脚，省心省力


No presser foot limitation, matches any market presser foot, easy and convenient.

2. 台面无任何再增加外载装置，丝毫不影响操作空间

Without any additional device, does not affect the operating space.

3. 线迹无鸟巢，前后剪线干净

No thread tangling on stitches, clean thread trimming front and back.

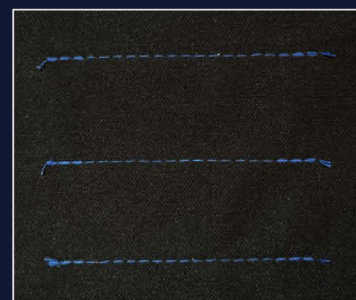

1968NFM_{Max}线迹

针送料结构



本机采用连杆式针送料结构，针送料方式使送料特性更加稳定，缝层之间不易产生滑移。

The machine adopts connecting rod type needle feeding structure, which makes the feeding characteristics more stable, it is not easy to slip between seam layers.


双电机剪线

两个步进电机驱动剪线机构，精准控制线头长度

Two stepper motors drive thread trimming, precise thread tail control.

结构简单、切线稳定。


stable and convenience on maintenance.



花样缝
Special Stitch Pattern



高品质加固缝
High-quality back-tacking

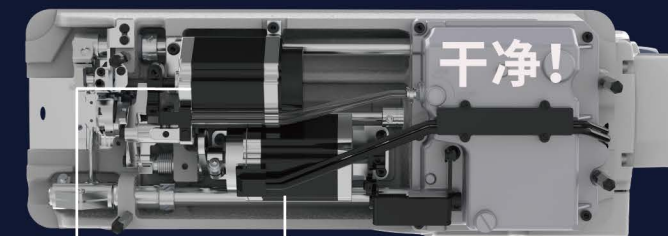

剪线马达
Auto-trimming
剪线&抬压脚马达
Auto-trimming & Auto-presser foot lifter motor

超短线头

起缝线头长4.5mm左右，后剪线头长3mm左右(标准配置)

Starting thread length about 4.5mm, ending thread length about 3mm (standard)



省成本
无需人工剪线头

Save cost
no need to trim thread manually



剪线稳
线头长度稳定一致

Stable trimming
The length of trimming thread
keeps stable



无空针
起缝首针带底线

No empty stitch, first
stitch with bobbin thread

产品参数 Product Parameter

机器型号 Model name	机针型号 Needle size	针距(mm) Length stitch	电子抬压脚 Auto-presser foot lifter	自动剪线 Auto trimming	下送料 Bottom feed
1968NFM _{Max}	(DB×1) #7~#16	0-5	有	有	有
倒缝 Reverse sewing	适用布料 Suitable fabric	旋梭 Hook	转速(rpm) Speed	体积(mm) CBM	毛净重(kg) G.W/N.W
有	薄料 中厚料 Medium & Light	标准旋梭 Standard	5000	620x280 x545	47.7/41.6