

DUMA




浙江杜马缝纫机股份有限公司
ZHEJIANG DUMA SEWING MACHINE CO., LTD.
地址：浙江省台州市椒江区机场南路58号
电话：0576-89086969 传真：0576-89086999
网址：www.cnduma.com



DM-1969SZ
超高速步进送料花样平缝机
Ultra-high-speed step-feeding pattern lockstitch sewing machine

DUMA 杜马

未来，我已来！

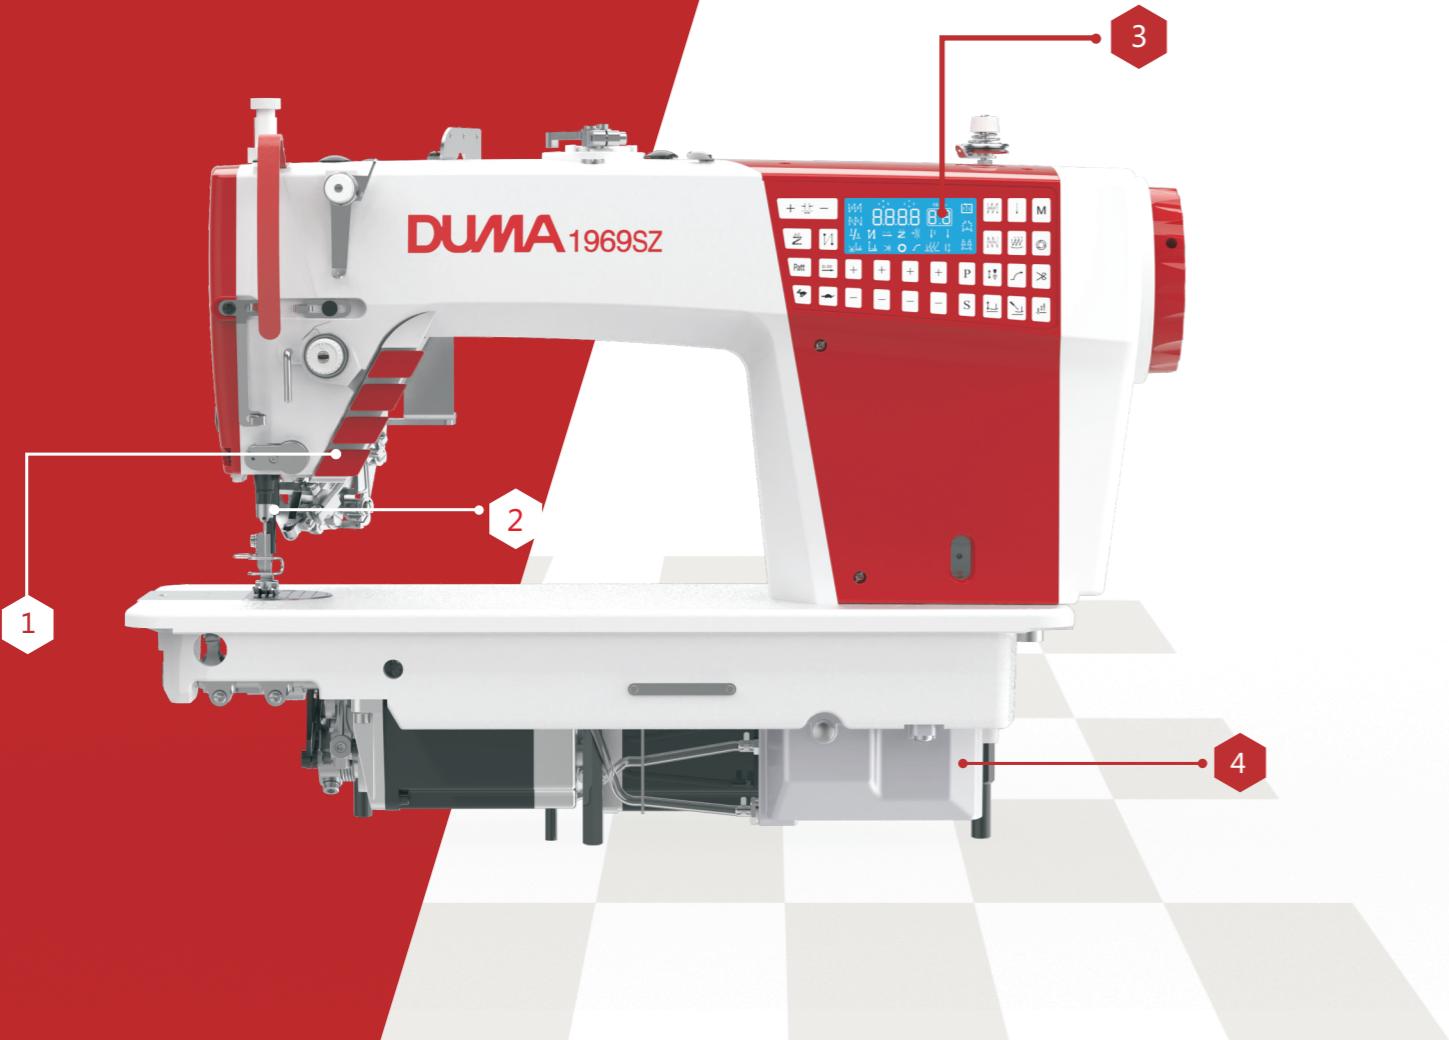

1

四个按键：
配有四个补针键，方便进行加固、补针
(补1针, 补1/2针, 1/4针), 倒缝操作。

Four buttons:
With four led button,it is convenient to reinforce and bartacking.

2

无油挑线杆：
采用无油挑线杆和针杆的头部设计，
实现清洁缝纫。

Oil-free thread take up lever:
The head design of oil-free thread take-up lever and needle bar realizes clean sewing.

3

按键屏操作面板
操作盒按键，内容直观，操作简便迅速。

Key screen operation panel:
Button operation panel, easy and fast working.


4

包油盘设计：
同步带传动结构，密封的油盒结构避免了缝料污染，同时减小整机运作的噪音。

Oil pan design:
Synchronous belt transmission structure, sealed oil box structure avoids sewing material pollution, while reducing the noise of the whole machine operation.

1969SZ步进直接送料 超高性价比!

1969SZ step-by-step direct feeding, super cost-effective!

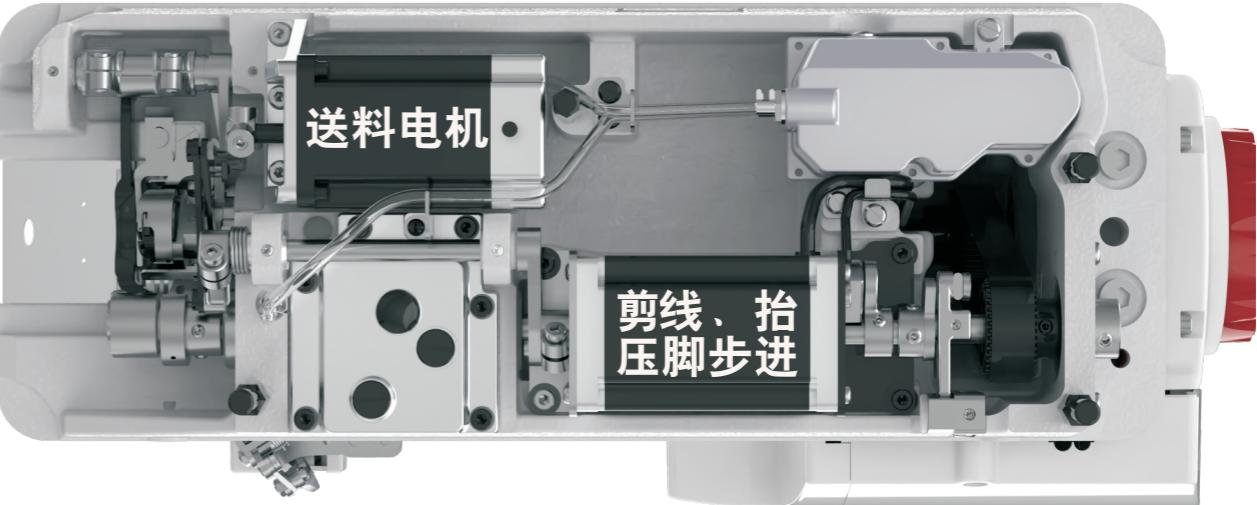


产品特点/Product Features



无油高转速 Super high speed dry head machine :

同步皮带联动上下机构，车缝速度可达至**4500rpm./min.**
Adopt Belt connect top and bottom movingsystem Max speed can reached **4500rpm./min.**




步进马达双向驱动 (专利技术) Step motor bidirectional driven (patent) :

一个马达完成切线和抬压脚动作。
One step motor control trimming and pressing foot lifter work.



步进电机直接送料 Feeding directly by stepping motor:

送料步进电机直接驱动，可实现送料牙轨迹变化。
The feeding stepper motor is directly driven, which can realize the change of the feeding tooth trajectory.



花样缝、加固缝 Special Stitch Pattern&reinforcement stitches:

由于步进马达控制，1969SZ可以自己设定产生D1-D9, 9种不同线迹。步进马达控制送料机构，可以实现精准的送料行程，不管针距设定大小，都可以实现针迹重合的加固缝。
1969SZ machine it can design 9 type stitch patterns by your idea, from D1-D9. Step motor control the feeding motion, it can achieve precise feed stroke ,realized high-quality reverse sewing.



电子脚靠 Electronic knee control:

不改变工人的操作习惯, 实现轻松抬压脚;
It easy to lift the presser foot and no change any worker sewing habit.

DM1969SZ M	(DBx1)#7 ~ #16	0-5	6-12	★	★	★	-	★	-	★	4500	680x290x640	45.5kg	
DM1969SZ H	(DPx5)#18 ~ #24	0-7	6-12	★	★	★	-	-	★	★	4000	680x290x640	45.5kg	
DM1969SZ N	(DPx5)#18 ~ #24	0-5	6-12	★	★	★	-	★	-	★	4500	680x290x640	45.5kg	